

# Ductless Split Systems

## J Series

### The Next Generation of Ductless Split Systems

Advanced technology delivering quiet, energy efficient comfort solutions



**FRIEDRICH**

1883



THE EXPERTS IN ROOM AIR CONDITIONING



WALL-MOUNTED

## All of the advantages of ductless systems and Friedrich quality

### ENERGY STAR® models

All Friedrich ductless models exceed the federal 13.0 SEER requirements. Of the 189 total possible single and multizone configurations, 129 models meet ENERGY STAR® published minimums with SEERS up to 25.0 and EERs up to 14.0.

### Zero duct loss

The DOE reports that ducted systems lose an average of 25-40% in performance due to leaks, cracks or disconnections in ductwork. No ductwork means that ductless systems do not experience duct loss, saving energy and money.

### Inverter variable capacity advantages

Inverter technology allows each system to adjust capacity and cooling output to provide only the amount of cooling needed at a given time. For example, an 18000 Btu system will operate even more efficiently at 15500 Btu or less if that's all that's needed, reducing energy consumption and improving comfort.

### No dirty air ducts\*

Now there's no need to clean dirty air ducts that can harbor dust, germs and allergens that are eventually blown into your home or office.

### Zone cooling flexibility

Independently condition up to (4) separate zones using only a single outdoor unit. Achieve the ultimate in comfort and energy control by cooling or heating only the zones that are in use. And, because each zone is independent of the others, comfort settings can vary.

### Optimized airflow

The indoor unit's 4-way air swing quickly disperses cool air to all four corners of the room to provide comfort throughout the room within a few minutes. The 'Surge Air' feature moves air at an even higher speed for rapid cooling.



FRIEDRICH'S  
HIGHEST ENERGY  
EFFICIENCIES EVER

  
**DIAMON GOLD**  
Advanced Corrosion Protection™



Protects the outdoor coil against deterioration and extends the life of the unit especially in harsh coastal environments.

\*Ductless wall-mounted and ceiling cassette models

types



CEILING CASSETTE



CONCEALED DUCT

Friedrich has 174 multizone configurations utilizing wall-mounted, ceiling cassette and concealed duct models

Enjoy the flexibility to mix and match systems to fit your application.

### Zone Cooling and Heating

Occupants have the ability to set the temperature of each zone to their preferred comfort level. The system will run as needed to maintain desired temperature.

Occupants may also turn off units in unoccupied rooms without affecting other zones.

That's the beauty and efficiency of a Friedrich multizone system.



## The Next Generation of Ductless Split Systems

# The Advantages of Friedrich's Precision Inverter System

Minimal temperature fluctuations. High energy efficiency.

Precision Inverter technology varies the compressor, the outdoor and the indoor fan speeds, eliminating constant compressor start-ups/shut-downs that traditional systems require to maintain the set temperature.


This is especially beneficial in multizone systems where room temperature set points vary and some indoor units may be turned off in unoccupied rooms.

Each system can adjust capacity and cooling output to provide only the amount of cooling needed at a given time. The result is optimal comfort with low energy costs.


TRADITIONAL SYSTEM	INVERTER SYSTEM
At initial start up, fixed capacity system slowly reaches the set temperature.	At initial start up, utilizes variable capacity to quickly reach the set temperature.
Complete shutdown once set temperature is achieved.	Reduces capacity as set temperature is achieved.
Temperature within the space rises until 2nd system start up.	Variable capacity maintains set temperature keeping space comfortable with reduced energy consumption.
System works at full capacity to again reach set temperature.	
System cycles on and off continually to maintain the set temperature.	

### ▼ LEAST EFFICIENT

**CONVENTIONAL SYSTEMS** run at a single capacity, turning on and off to reach the desired set point. This means they run at full speed each time, resulting in high energy consumption.

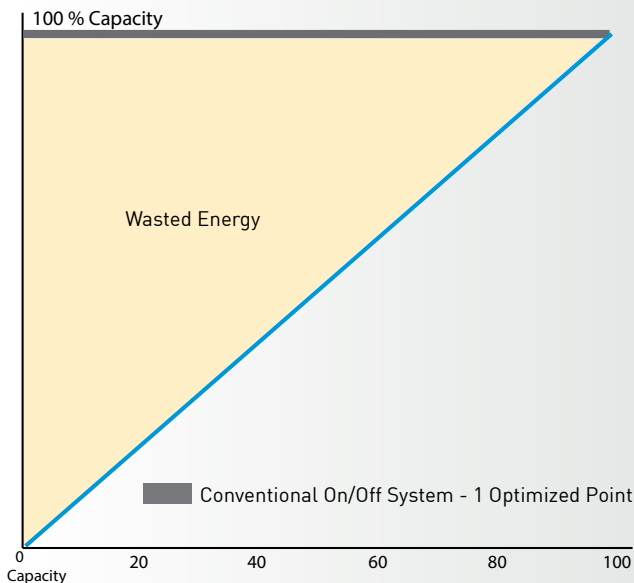

**TWO-STAGE AIR CONDITIONERS** won't significantly reduce your energy use. These units only run at 2 speeds, 50% and 100%, also resulting in high energy consumption.

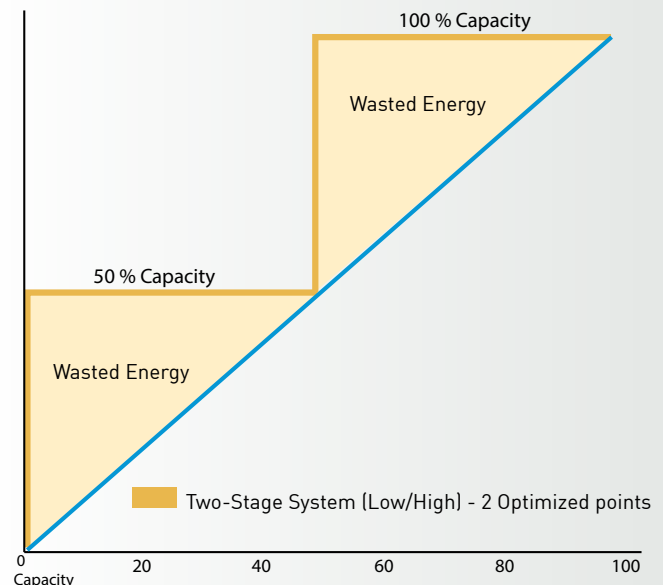


# No other system matches the efficiency and performance of Friedrich's Precision Inverter

It achieves better energy efficiency by using 1Hz increments. This allows the unit to produce only the output necessary to reach the desired temperature. The result is optimal performance and increased energy efficiency.




MOST EFFICIENT ▼

**TYPICAL INVERTER SYSTEMS** make changes in **7 Hz increments** allowing the unit to run at variable speeds, delivering a more precise heating-cooling solution.

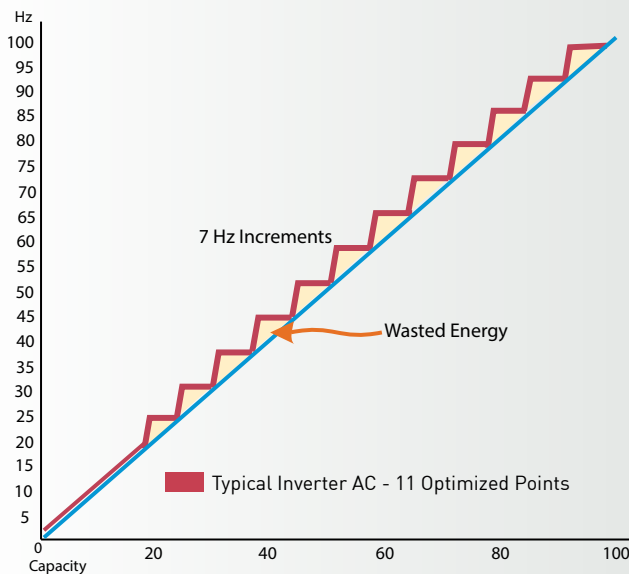

**FRIEDRICH PRECISION INVERTER SYSTEMS** make changes in **1Hz increments** allowing the unit to run at variable speeds, delivering the most precise heating-cooling solution.

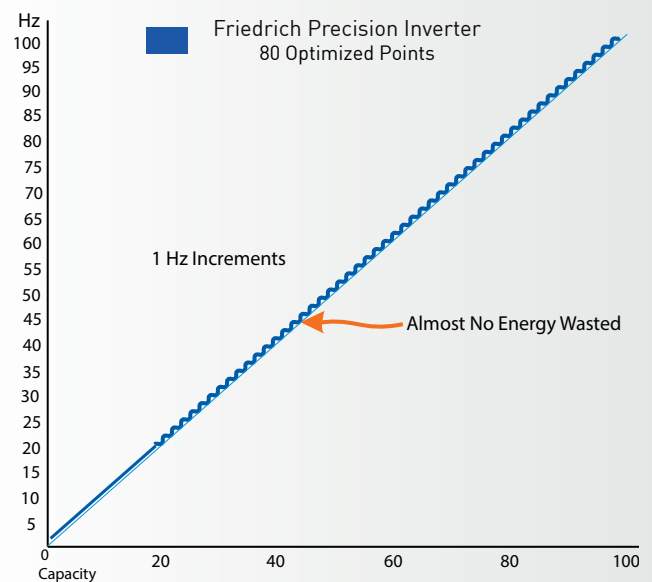

## The Next Generation of Ductless Split Systems

Attractive and high efficiency options for cooling and heating residential and light commercial spaces.

Wall-mounted models mount high on the wall.


The attractive, neutral finish blends well with just about any decor.



### Residential Applications

- Room additions/renovations
- Homes without ductwork
- Bedrooms and family rooms
- Garage workshops
- Sunrooms
- Guest quarters



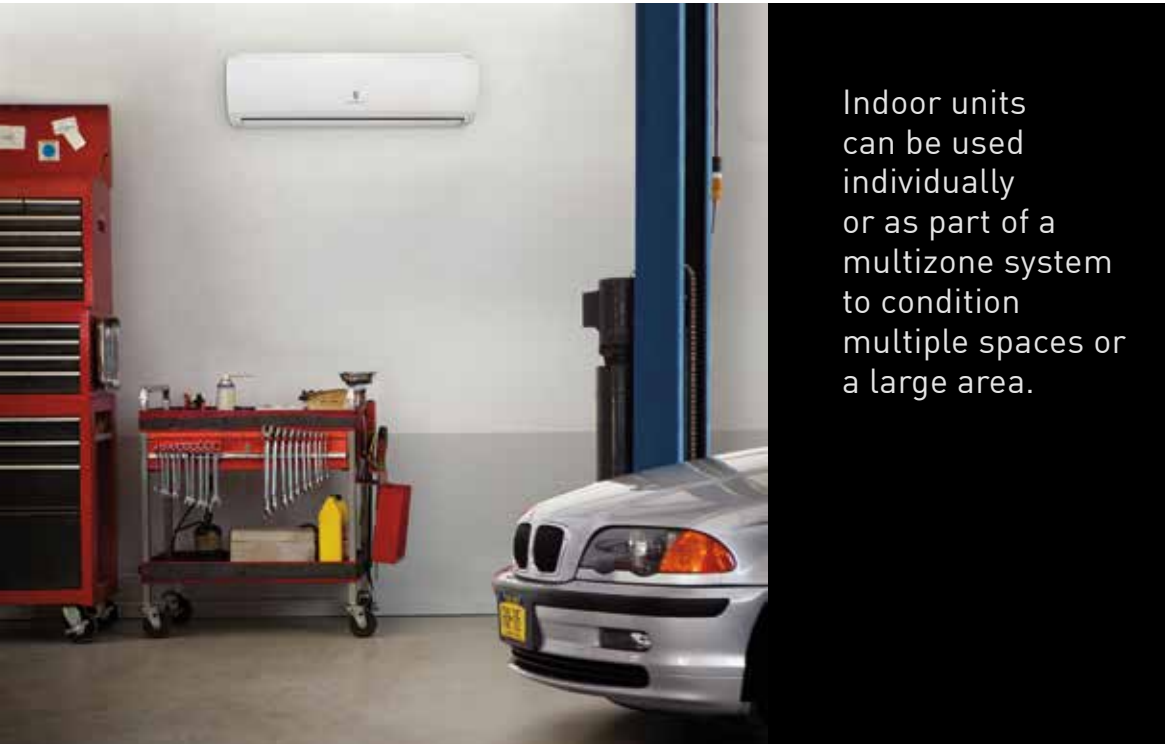

Indoor units can be used individually or as part of a multizone system to condition multiple spaces or a large area.



---

## Commercial Applications

- Hotels and other lodging
- Computer rooms and server rooms
- Restaurant kitchen and prep areas
- Offices in warehouse spaces
- Storage facilities
- Buildings where security concerns prevent the use of window units
- Internal areas without exterior wall access

## The Next Generation of Ductless Split Systems

### Features you'll find with Friedrich Ductless Systems:

System Type	Wall-mounted Single Zone	Wall-mounted Multizone	Cassette Single Zone	Cassette Multizone	Concealed Duct Single Zone	Concealed Duct Multizone
Installation	Wall	Wall	Ceiling	Ceiling	Ceiling	Ceiling
Cool only	Y	N	N	N	N	N
Heat pump	Y	Y	Y	Y	Y	Y
115 volt models	Y	N	N	N	N	N
Inverter driven compressor	Y	Y	Y	Y	Y	Y
SEER	Up to 25.0	Up to 21.7	Up to 19	Up to 16.5	Up to 17.6	Up to 16.5
Auto changeover	Y	N	Y	N	Y	N
Low ambient operation	0° F with optional baffle kit. 14° F without.	0° F with optional baffle kit. 14° F without.	5° F	5° F	5° F	5° F
24- Hr. Programmable timer	Y	Y	Y	Y	N	N
Remote control	Y	Y	Y	Y	N	N
Wall controller option	Y	Y	Y	Y	Y	Y
7-Day Programmability (with wall control)	Y	Y	Y	Y	Y	Y
Auto restart	Y	Y	Y	Y	Y	Y
Surge cool/heat	Y	Y	Y	Y	N	N
Dry mode	Y	Y	Y	Y	Y	Y
Auto Clean	Y	Y	N	N	N	N
DiamonGold Advanced Corrosion Protection™	Y	Y	Y	Y	Y	Y
4-way auto swing	Y	Y	Y	Y	N	N
Washable, antimicrobial air filters	Y	Y	Y	Y	Y	Y
Auto shut flaps when unit is off	Y	Y	Y	Y	N	N
Louver Position (Fan/Cool/Heat)	6 / 6 / 6	6 / 6 / 6	4 / 5 / 4	4 / 5 / 4	N	N

---

#### Auto clean

Indoor blower runs to remove dust, dirt and moisture from the coil after system is shutdown.

---

#### Surge cool/heat

Allows quick cooling/heating. In this mode the unit will operate at 100% for 30 minutes to cool/heat the room rapidly.

---

#### Built-in low ambient standard

Allows wall-mounted unit's operation down to 14°F in cooling mode. Down to 5° F in concealed duct and cassette models.

---

#### Auto changeover (Single zone only)

Automatically changes over from cool to heat and heat to cool to maintain the set temperature.

---

#### Auto restart

Auto restart function allows system to resume with previous settings in the event of a power shutdown. (Power supply must be restored).

---

#### Dry mode

Reduces the humidity when cooling needs are low.

---

#### 4-way auto swing

Louvers will automatically move up/down and left / right to maintain a uniform room temperature.

---

#### DiamonGold Advanced Corrosion Protection™

Protects the outdoor coil against deterioration and extends the life of the unit especially in harsh coastal environments.



The indoor cross-flow fan and a low vibration compressor provide ultra quiet operation indoors and outdoors.

**Ultra quiet cross-flow fan**


An electronically controlled cross-flow fan creates an ultra quiet, yet powerful air flow into the room.

**Low vibration, twin-rotary compressor**

Friedrich's twin-rotary compressor has a unique design that reduces vibration for lower sound levels outdoors.

**BLDC fan motor**


Brushless, digitally commutated motor with accurate speed control that makes the electrical and mechanical operation smoother, more reliable and more efficient.

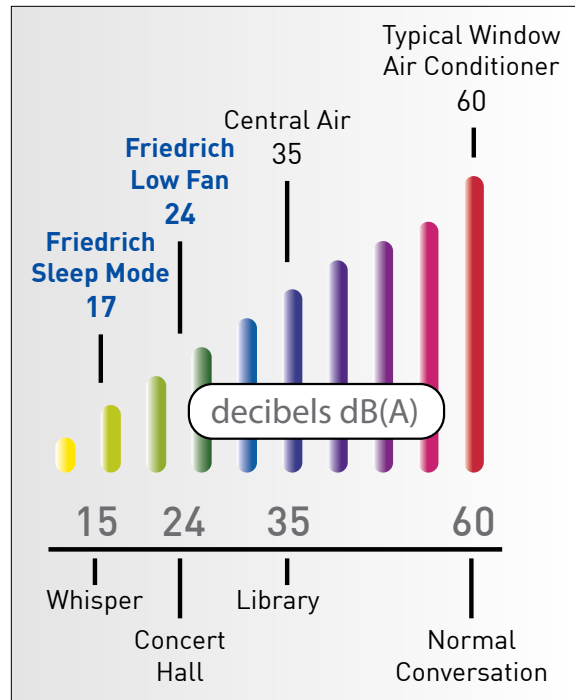

**Powerful airflow for faster heating and cooling.**


**Optimum air flow**

Air is directed downward in heating mode and angled upward during cooling mode so the room feels more comfortable, faster.

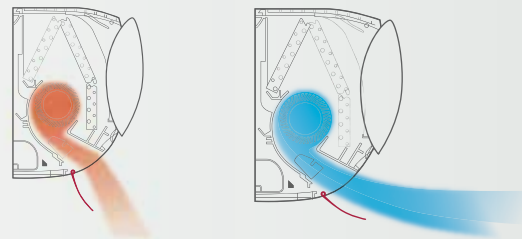


**Large fans**

Powerful fans move the air across the room- up to 39 feet away. That means faster cooling and heating and you feel comfortable sooner no matter where you are in the room.

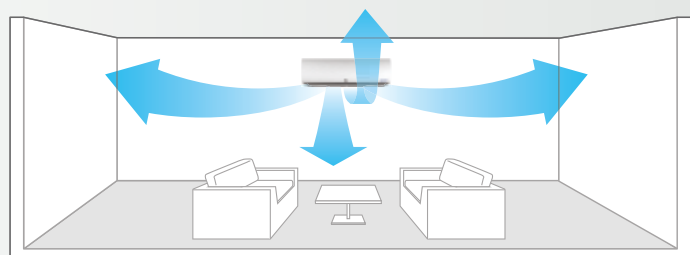

## The Next Generation of Ductless Split Systems

Convenient installation features that will get your ductless running in no time.

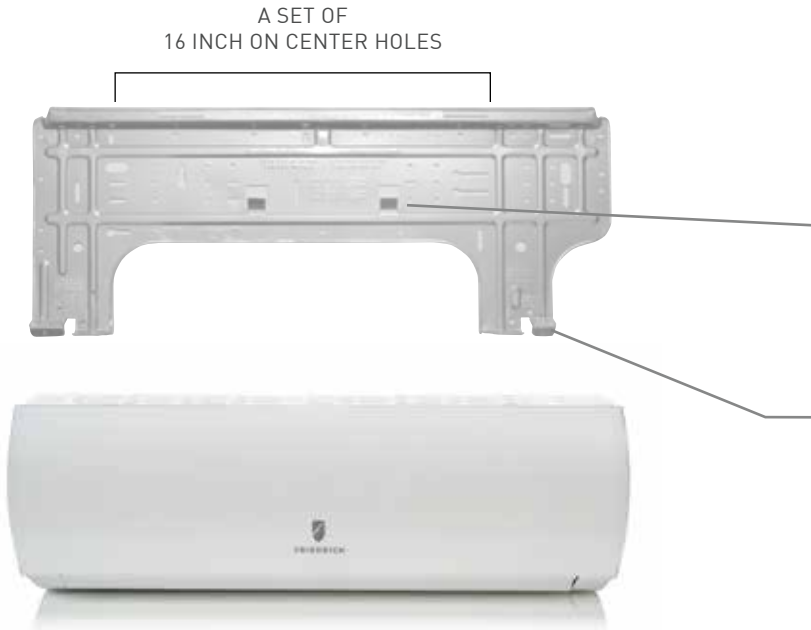

Model MWH12Y3J indoor unit and hanging bracket shown. Hanging bracket appearance will vary by model.

### UNIQUE MOUNTING BRACKET

---

#### 16" on Center

The hanging bracket comes with a set of holes that are placed 16" apart from each other to help you attach the bracket securely to "16 on center" wall studs.

---

#### Level-Line Ledges

Incorporated "Level-Line Ledges" ensure a straight wall mount and frees both hands for an easy single-person installation.

---

#### Tape Measure Assist

The integrated "blade grip" securely keeps measuring tape in place. The "blade grip" gives you a helping hand when installing the bracket to the wall.

---



#### Wall Standoff Bracket

The clip keeps sufficient space between the unit and the wall creating more room for installation.

---

#### Spacious Tubing Area

Ample space was created to facilitate tubing installation and placement.

---

#### Low Installation Access Panel

By lowering the access panel to eye-level we have created a hassle-free access to electrical connections.

---



#### Secure Grip Screws\*

"Grip Screws" firmly secure wall-mounted unit to wall bracket providing a stable setup.

\* Not available on MW30Y3J and MW36Y3J.

## OPTIONAL ACCESSORIES

### Refrigeration Line Sets

USED WITH	Length Ft.	Liquid	Suction	Kit#
9000 and 12000 Btu indoor units	15'	1/4"	3/8"	T32150
	35'	1/4"	3/8"	T32350
18000 Btu indoor units	15'	1/4"	1/2"	T42150
	35'	1/4"	1/2"	T42350
24000, 30000 and 36000 Btu indoor units	15'	3/8"	5/8"	T53150
	35'	3/8"	5/8"	T53350

### Low Ambient Wind Baffle Kit

Wind baffle allows operation down to 0 °FWB.  
(Available for Wall-Mounted Single Zone)

WIND BAFFLE	USED WITH
DLAWB1	9000 - 12000 Btu wall-mounted single zone models
DLAWB2	18000 - 36000 Btu wall-mounted single zone models



### Thermostat

DWC1-Wired, 7-day fully programmable wall thermostat.  
(Available for all models)



### Ceiling Cassette Grilles (Required accessory)

Required decorative grille for ceiling cassette models

DECORATIVE GRILLE	USED WITH
DCG1218	MC12Y3JM, MC18Y3JM - 12000 and 18000 Btu models
DCG2436	MC24Y3J, MC36Y3J- 24000 and 36000 Btu models



### Friedrich's Ductless Split systems are compatible with aftermarket drain pumps and condensate sensors.

For more information visit the following sites:

#### Condensate Pumps

Rectorseal/Aspen Pumps: <http://airtec.rectorseal.com/pumpselector>.

#### Condensate Sensors

Rectorseal, Safe-T-Switch® [www.rectorseal.com](http://www.rectorseal.com)

Aqua guard: [www.rctus.com/product](http://www.rctus.com/product)

#### Adapter

Adapter is available through Friedrich parts distributors.

All R410A models have 1/2"-20 UNF (5/16" SAE) X 1/4" SAE thread per inch charging and vacuuming ports.  
An adapter must be used for 1/4" gauges.

## SINGLE ZONE WALL-MOUNTED

9000-24000 Btu. Cool only models with features for convenient operation, care-free comfort and years of dependability.

### Features

- Inverter technology (variable speed compressor)
- BLDC motors
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Fan mode
- Surge cool
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer
- Built-in kick stand
- Multiple ease of installation features (see p.10)



WIRELESS  
REMOTE CONTROL



MW09C1J, MW12C1J



MW18C3J\*, MW24C3J\*

\*Models M18CJ, M24CJ and components MW18C3J, MR18C3J, MW24C3J and MR24C3J are not available for sale in AZ, CA, NM or NV.



MR09C1J, MR12C1J



MR18C3J



MR24C3J



# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Cool Only			
		9k	12k	18k	24k
SYSTEM MODEL NO.		M09CJ	M12CJ	M18CJ*	M24CJ*
INDOOR MODEL		MW09C1J	MW12C1J	MW18C3J*	MW24C3J*
OUTDOOR MODEL		MR09C1J	MR12C1J	MR18C3J*	MR24C3J*
SPECIFICATIONS					
CAPACITY COOLING (RATED)	Btu	9,000	11,200	17,000	22,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070-12,120	3,070-13,660	3,070-20,470	3,070-26,270
CAPACITY HEATING (RATED)	Btu	N/A	N/A	N/A	N/A
CAPACITY HEATING (MIN-MAX)	Btu	N/A	N/A	N/A	N/A
COOLING AMPS		6	8.4	7	8.7
HEATING AMPS		N/A	N/A	N/A	N/A
SENSIBLE HEAT RATIO		.72	.73	.72	.72
SEER		21.5	21.5	18.0	20.0
EER		13.3	12.5	12.0	10.8
HSPF		N/A	N/A	N/A	N/A
ENERGY STAR		YES	YES	NO	NO
MOISTURE REMOVAL	Pts/h	2.3	3.0	4.2	5.5
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/371/441/512	300/389/512/680
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45	29 / 35 / 40 / 46
SOUND RATING - OUTDOOR	dB-A	45	45	53	54
OPERATING RANGE WIND BAFFLE)	°FDB	14(0)-118	14(0)-118	14(0)-118	14(0)-118
OPERATING RANGE (HEATING)	°FWB	N/A	N/A	N/A	N/A
EST. YEARLY OPERATING COST	\$	61	81	127	183
ELECTRICAL DATA					
POWER SOURCE	V	115/60/1	115/60/1	208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	12	12	19	19
COOLING WATTS	W	677	896	1416	2037
MAX. TD FUSE/BREAKER	A	20	20	25	25
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14	4 x 14
REFRIGERATION SYSTEM					
REFRIGERANT		R410A	R410A	R410A	R410A
COMPRESSOR TYPE		Single Rotary	Single Rotary	Single Rotary	Inverter
CONNECTIONS		Flare	Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4	3/8
SUCTION LINE O.D.	in	3/8	3/8	1/2	5/8
FACTORY PRECHARGE	ft	41	41	25	25
REFRIGERANT CHARGE	oz	36	36	48	64
MIN./MAX. LINE LENGTH	ft	7-66	7-66	10-66	10-98
MAX. HEIGHT DIFFERENCE	ft	33	33	33	49
DIMENSIONS & WEIGHT					
INDOOR UNIT					
W X H X D	in	35-1/4x 11-1/4x 8-5/16		40-5/8x 12-7/8x 9-5/8	40-5/8x 12-7/8x 9-5/8
NET WEIGHT	lbs	23	23	32	33
SHIPPING WEIGHT	lbs	27	27	40	41
OUTDOOR UNIT					
W X H X D	in	30-5/16x 21-5/16x 11-5/16		34-5/16x25-7/8x12-5/8	34-5/16 x31-1/2 x12-5/8
NET WEIGHT	lbs	78	78	97	122
SHIPPING WEIGHT	lbs	79	79	101	130
TOTAL NET WEIGHT	lbs	101	101	129	155
TOTAL SHIPPING WEIGHT	lbs	106	106	169	196

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## SINGLE ZONE 25.0 SEER WALL-MOUNTED

12000 Btu. Our most efficient unit ever! Features for comfort and convenience year 'round. In heating mode, unit efficiently heats by using approximately 1/4 of the energy required by electric heat.

### Features

- Inverter technology (variable speed compressor)
- BLDC motor
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan/Auto mode
- Surge Cool/Heat
- Natural air flow
- Ultra quiet operation
- Sleep mode
- Auto restart
- Auto changeover
- Low ambient operation down to 14°F (Cooling Mode)
- 24-hour on/off timer
- ENERGY STAR® qualified model
- Hidden display (only visible during operation)
- Multiple ease of installation features (see p.10)



MWH12Y3J



WIRELESS  
REMOTE CONTROL



MRH12Y3J

  
**DIAMONGOLD**  
Advanced Corrosion Protection™



**PRECISION  
INVERTER**



# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump
		12k
SYSTEM MODEL NO.		HM12YJ
INDOOR MODEL		MWH12Y3J
OUTDOOR MODEL		MRH12Y3J
SPECIFICATIONS		
CAPACITY COOLING (RATED)	Btu	12,000
CAPACITY COOLING (MIN-MAX)	Btu	3070~14660
CAPACITY HEATING@47°F (RATED)	Btu	13,600
CAPACITY HEATING@17°F (RATED)	Btu	8,800
CAPACITY HEATING (MIN-MAX)	Btu	3070~20470
COOLING AMPS		3.8
HEATING AMPS		4.3
SENSIBLE HEAT RATIO		.70
SEER		25.0
EER		14.1
HSPF		11.0
ENERGY STAR		Yes (Most Efficient)
MOISTURE REMOVAL	Pts/h	1.7
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	177 / 283 / 417 / 494
SOUND RATING - INDOOR	dB-A	17 / 25 / 36 / 42
SOUND RATING - OUTDOOR	dB-A	51
OPERATING RANGE (COOLING)	°F	14~118
OPERATING RANGE (HEATING)	°F	14~75
EST. YEARLY OPERATING COST	\$	77
ELECTRICAL DATA		
POWER SOURCE	V	208/230/60/1
MINIMUM AMPACITY	A	10
COOLING WATTS	W	857
HEATING WATTS	W	960
MAX. TD FUSE/BREAKER	A	15
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14
REFRIGERATION SYSTEM		
REFRIGERANT		R410A
COMPRESSOR TYPE		Twin Rotary
CONNECTIONS		Flare
LIQUID LINE O.D.	in	1/4
SUCTION LINE O.D.	in	3/8
FACTORY PRECHARGE	ft	25
REFRIGERANT CHARGE	oz	44
MIN./MAX. LINE LENGTH	ft	10~49
MAX. HEIGHT DIFFERENCE	ft	23
DIMENSIONS & WEIGHT		
INDOOR UNIT		
W X H X D	in	34-7/16 x 11-5/8 x 9-1/4
NET WEIGHT	lbs	25
SHIPPING WEIGHT	lbs	29
OUTDOOR UNIT		
W X H X D	in	34-5/16 x 25-7/8 x 12-5/8
NET WEIGHT	lbs	95
SHIPPING WEIGHT	lbs	100
TOTAL NET WEIGHT	lbs	119
TOTAL SHIPPING WEIGHT	lbs	128

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## SINGLE ZONE WALL-MOUNTED

9000-18000 Btu. Features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

### Features

- Inverter technology (variable speed compressor)
- BLDC motors
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Auto changeover
- Built-in low ambient standard, down to 14°F (Cooling Mode), down to 0°F with wind baffle
- 24-hour on/off timer
- Multiple ease of installation features (see p.10)



MW09Y3J, MW12Y3J



MW18Y3J



WIRELESS  
REMOTE CONTROL



MR09Y3J, MR12Y3J



MR18Y3J



# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump		
		9k	12k	18k
SYSTEM MODEL NO.		M09YJ	M12YJ	M18YJ
INDOOR MODEL		MW09Y3J	MW12Y3J	MW18Y3J
OUTDOOR MODEL		MR09Y3J	MR12Y3J	MR18Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	9,000	11,200	17,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070~12,620	3,070~14,660	3,070~20,470
CAPACITY HEATING @47° F (RATED)	Btu	10,800	13,300	20,200
CAPACITY HEATING @17° F	Btu	6,600	8,700	13,200
CAPACITY HEATING (MIN-MAX)	Btu	3,070~17,060	3,070~20,470	3,070~30,700
COOLING AMPS		3	4.2	7
HEATING AMPS		3.7	4.9	7.3
SENSIBLE HEAT RATIO		.72	.73	.73
SEER		21.5	21.5	18.0
EER		13.3	12.5	12.0
HSPF		11.0	11.0	9.7
ENERGY STAR		YES	YES	NO
MOISTURE REMOVAL	Pts/h	2.3	3.0	4.2
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/371/441/512
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45
SOUND RATING - OUTDOOR	dB-A	45	45	53
OPERATING RANGE (COOLING)(WIND BAFFLE)	°FDB	14(0)~118	14(0)~118	14(0)~118
OPERATING RANGE (HEATING)	°FWB	-4~75	-4~75	-4~75
EST. YEARLY OPERATING COST	\$	61	81	127
ELECTRICAL DATA				
POWER SOURCE	V	208/230/60/1	208/230/60/1	230/208/60/1
MINIMUM AMPACITY	A	10	10	19
COOLING WATTS	W	677	896	1416
HEATING WATTS	W	700	1000	1680
MAX. TD FUSE/BREAKER	A	15	15	20
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14
REFRIGERATION SYSTEM				
REFRIGERANT		R410A	R410A	R410A
COMPRESSOR TYPE		Single Rotary	Single Rotary	Twin Rotary
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	1/2
FACTORY PRECHARGE	ft	41	41	25
REFRIGERANT CHARGE	oz	36	36	48
MIN./MAX. LINE LENGTH	ft	7~66	7~66	10~66
MAX. HEIGHT DIFFERENCE	ft	33	33	33
DIMENSIONS & WEIGHT				
INDOOR UNIT				
W X H X D	in	35-1/4 x11-1/4 x8-1/4	35-1/4 x11-1/4 x8-1/4	40-5/8 x 12-7/8 x 9-5/8
NET WEIGHT	lbs	23	23	31
SHIPPING WEIGHT	lbs	27	27	40
OUTDOOR UNIT				
W X H X D	in	30-5/16x21-5/16x11-5/16	30-5/16x21-5/16x11-5/16	34-5/16x25-7/8x12-5/8
NET WEIGHT	lbs	78	78	97
SHIPPING WEIGHT	lbs	79	79	101
TOTAL NET WEIGHT	lbs	101	101	128
TOTAL SHIPPING WEIGHT	lbs	106	106	141

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## SINGLE ZONE WALL-MOUNTED

24000-36000 Btu. Features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

### Features

- Inverter technology (variable speed compressor)
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Auto changeover
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer
- Multiple ease of installation features (see p.10)



MW24Y3J, MW30Y3J, MW36Y3J



WIRELESS  
REMOTE CONTROL



MR24Y3J, MR30Y3J, MR36Y3J



# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump		
		24k	30k	36k
SYSTEM MODEL NO.		M24YJ	M30YJ	M36YJ
INDOOR MODEL		MW24Y3J	MW30Y3J	MW36Y3J
OUTDOOR MODEL		MR24Y3J	MR30Y3J	MR36Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	22,000	30,000	33,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070-30,030	3,070-34,000	3,070-34,000
CAPACITY HEATING @47° F (RATED)	Btu	27,600	32,000	35,200
CAPACITY HEATING @17° F (RATED)	Btu	17,900	21,200	23,200
CAPACITY HEATING (MIN-MAX)	Btu	3,070-38,898	3,070-38,900	3,070-38,900
COOLING AMPS		7.9	13.4	17.0
HEATING AMPS		10.7	13.9	16.2
SENSIBLE HEAT RATIO		.72	.78	.78
SEER		21.0	18.5	16.5
EER		12.5	10.0	8.2
HSPF		11.0	10.0	10.0
ENERGY STAR		YES	No	No
MOISTURE REMOVAL	Pts/h	5.5	6.0	6.5
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	300/389/512/600	459/530/706/848	459/530/706/848
SOUND RATING - INDOOR	dB-A	33 / 39 / 43 / 46	33 / 39 / 44 / 49	37 / 40 / 44 / 49
SOUND RATING - OUTDOOR	dB-A	54	55	55
OPERATING RANGE (COOLING)(WIND BAFFLE)	°F	14(0)-118	14(0)-118	14(0)-118
OPERATING RANGE (HEATING)	°F	-4-75	-4-75	-4-75
EST. YEARLY OPERATING COST	\$	158	270	395
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14
ELECTRICAL DATA				
POWER SOURCE	V	208/230/60/1	208/230/60/1	230/208/60/1
MINIMUM AMPACITY	A	19	19	19
COOLING WATTS	W	1760	3000	4024
MAX. TD FUSE/BREAKER	A	25	25	25
REFRIGERATION SYSTEM				
REFRIGERANT		R410A	R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8	5/8
FACTORY PRECHARGE	ft	25	25	25
REFRIGERANT CHARGE	oz	78	78	78
MIN./MAX. LINE LENGTH	ft	10-164	10-164	10-164
MAX. HEIGHT DIFFERENCE	ft	98	98	98
DIMENSIONS & WEIGHT				
INDOOR UNIT				
W X H X D	in	46-7/8 x 13-5/8 x 10-3/8	46-7/8 x 13-5/8 x 10-3/8	46-7/8 x 13-5/8 x 10-3/8
NET WEIGHT	lbs	40	40	40
SHIPPING WEIGHT	lbs	46	46	46
OUTDOOR UNIT				
W X H X D	in	34-5/16 x 31-1/2 x 12-5/8	34-5/16 x 31-1/2 x 12-5/8	34-5/16 x 31-1/2 x 12-5/8
NET WEIGHT	lbs	125	125	125
SHIPPING WEIGHT	lbs	132	132	132
TOTAL NET WEIGHT	lbs	165	165	165
TOTAL SHIPPING WEIGHT	lbs	178	178	178

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## SINGLE ZONE CEILING CASSETTE

24000 and 36000 Btu. Indoor units are typically installed in a drop ceiling. The grille fits almost flush with the ceiling for a clean look and efficient installation.

### Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 27 1/2" lift\* included
- Natural air flow
- 4-Way cooling
- Surge Cool/Heat
- Cooling/Heating/Fan mode
- Dry mode
- Sleep mode
- Built-in low ambient standard, down to 5°F (Cooling mode)
- Independent vane control
- 3 Fan speeds
- Evaporator frost control
- 24-hour on/off timer
- Auto restart
- Auto changeover
- Temperature display on remote
- Ultra-quiet turbo fan
- DiamonGold Advanced Corrosion Protection™
- Clean, modern look
- Flexible installation
- ENERGY STAR® qualified models
- Precise air distribution

\* Lift from drain pan to the highest point. Use external drain pump for installations requiring condensate lift exceeding 27 1/2"



WIRELESS  
REMOTE CONTROL



MC24Y3J



MR24UY3J



Low profile indoor unit is recessed into the ceiling for a clean look and greater clearance.

**NOTE: Grilles are sold separately.**

See optional accessories on page 11.



MC36Y3J



MR36UY3J



# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Cassette - Heat Pump	
		24k	36k
SYSTEM MODEL NO.		C24YJ	C36YJ
INDOOR MODEL		MC24Y3J	MC36Y3J
OUTDOOR MODEL		MR24UY3J	MR36UY3J
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	24,000	36,000
CAPACITY COOLING (MIN-MAX)	Btu	9,700~26,700	14,000~42,000
CAPACITY HEATING @47° F (RATED)	Btu	27,000	40,000
CAPACITY HEATING @17° F (RATED)	Btu	18,600	26,000
CAPACITY HEATING (MIN-MAX)	Btu	10,900~30,000	14,500~45,000
COOLING AMPS		15.1	20.2
HEATING AMPS		16.0	24.0
SENSIBLE HEAT RATIO		.77	.76
SEER		17.0	19.0
EER		12.6	13.5
HSPF		9.7	9.5
ENERGY STAR *		Yes	Yes
MOISTURE REMOVAL	Pts/h	5.1	7.7
AIRFLOW (LOW, MED, HIGH )	CFM	459 / 530 / 600	918 / 989 / 1,060
SOUND RATING - INDOOR H/M/L	dB(A)	38/36/34	46/44/43
SOUND RATING - OUTDOOR	dB(A)	62	67
OPERATING RANGE (COOLING)	°FDB	5~118	5~118
OPERATING RANGE (HEATING)	°FWB	-4~64	-4~64
EST. YEARLY OPERATING COST	\$	172	240
ELECTRICAL DATA			
POWER SOURCE	V	208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	18.1	24.5
COOLING WATTS	W	1910	2970
MAX. TD FUSE/BREAKER	A	30	40
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8
FACTORY PRECHARGE	ft	25	25
REFRIGERANT CHARGE	oz	71	120
MIN./MAX. LINE LENGTH	ft	25~164	25~246
MAX. HEIGHT DIFFERENCE	ft	98	98
DIMENSIONS & WEIGHT			
INDOOR UNIT			
W X H X D	in	33-1/16 x 8-1/16 x 33-1/16	33-1/16 x 11-3/8 x 33-1/16
NET WEIGHT	lbs	45	54
SHIPPING WEIGHT	lbs	58	65
INDOOR UNIT GRILLE** W X H X D	in	37-3/8 x 15/16 x 37-3/8	37-3/8 x 15/16 x 37-3/8
INDOOR UNIT GRILLE** NET WEIGHT	lbs	11	11
OUTDOOR UNIT			
W X H X D	in	37-7/16 x 32-7/8 x 13	37-13/32 x 54-3/8 x 13
NET WEIGHT	lbs	132	203
SHIPPING WEIGHT	lbs	146	227
TOTAL NET WEIGHT	lbs	178	257
TOTAL SHIPPING WEIGHT	lbs	203	293

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

\*System meets ENERGY STAR® published minimums.

\*\*Models require grille. Sold separately.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## SINGLE ZONE CONCEALED DUCT

24000 and 36000 Btu. Indoor unit is installed in the ceiling or furr down for unobtrusive installation.

### Features

- Inverter technology (variable speed compressor)
- BLDC motor
- Internal condensate pump with 27 1/2" lift\* included
- Cooling/Heating/Fan mode
- Dry mode
- 3 Fan speeds
- 24-hour on/off timer
- Auto restart
- Auto changeover
- Sleep mode
- Control lock function on controller
- External Static Pressure Range(ESP)
  - 24,000 (0.1 - 0.78) WC
  - 36,000 (0.15 - 0.6) WC

\* Lift from drain pan to highest point. Use external drain pump for installations requiring condensate lift exceeding 27 1/2"



MD24Y3J, MD36Y3J



WIRED WALL  
CONTROLLER



MR24UY3J



MR36UY3J

**DIAMOND GOLD**  
Advanced Corrosion Protection™



**PRECISION  
INVERTER**

# SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Concealed Ducted - Heat Pumps	
		24k	36k
SYSTEM MODEL NO.		D24YJ	D36YJ
INDOOR MODEL		MD24Y3J	MD36Y3J
OUTDOOR MODEL		MR24UY3J	MR36UY3J
<b>SPECIFICATIONS</b>			
CAPACITY COOLING (RATED)	Btu	24,000	36,000
CAPACITY COOLING (MIN-MAX)	Btu	9,700~26,700	16,000~41,400
CAPACITY HEATING @47°F (RATED)	Btu	27,000	40,000
CAPACITY HEATING @17°F (RATED)	Btu	17,600	24,600
CAPACITY HEATING (MIN-MAX)	Btu	10,900~30,000	17,500~48,000
COOLING AMPS		15.1	20.8
HEATING AMPS		15.1	21.4
SENSIBLE HEAT RATIO		.68	.67
SEER		17.0	17.6
EER		12.0	12.1
HSPF		10.0	9.2
ENERGY STAR		No	No
MOISTURE REMOVAL	Pts/h	7.0	10.6
AIRFLOW (LOW, MED, HIGH )	CFM	530 / 618 / 688	706 / 953 / 1,130
SOUND RATING - INDOOR H/M/L	dB(A)	38/36/35	39/38/37
SOUND RATING - OUTDOOR	dB(A)	62	67
OPERATING RANGE (COOLING)	°F	5~118	5~118
OPERATING RANGE (HEATING)	°F	-4~64	-4~64
EST. YEARLY OPERATING COST	\$	180	268
<b>ELECTRICAL DATA</b>			
POWER SOURCE		208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	18.1	24.5
COOLING WATTS	W	2000	2910
MAX. TD FUSE/BREAKER	A	30	40
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14
<b>REFRIGERATION SYSTEM</b>			
REFRIGERANT		R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8
FACTORY PRECHARGE	ft	25	25
REFRIGERANT CHARGE	oz	71	120
MIN./MAX. LINE LENGTH	ft	25~164	25~246
MAX. HEIGHT DIFFERENCE	ft	98	98
<b>DIMENSIONS &amp; WEIGHT</b>			
<b>INDOOR UNIT</b>			
W X H X D	in	46-9/16 x 11-3/4 x 17-3/4	48-1/2 x 15 x 23-1/4
NET WEIGHT	lbs	73	125
SHIPPING WEIGHT	lbs	95	139
<b>OUTDOOR UNIT</b>			
W X H X D	in	37-7/16 x 32-7/8 x 13	37-7/16 x 54-3/8 x 13
NET WEIGHT	lbs	132	203
SHIPPING WEIGHT	lbs	146	227
TOTAL NET WEIGHT	lbs	205	327
TOTAL SHIPPING WEIGHT	lbs	240	366

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## MULTIZONE WALL-MOUNTED

High efficiency heat pumps with features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

### Features

- Inverter technology (variable speed compressor)
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer
- Built-in kick stand



MW09Y3J, MW12Y3J



MW18Y3J



WIRELESS  
REMOTE CONTROL



MR24DY3JM



MR36TQY3JM

# SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Wall-Mounted - Heat Pumps		
		9k	12k	18k
INDOOR MODEL		MW09Y3J	MW12Y3J	MW18Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	9,000	11,200	17,000
CAPACITY HEATING (RATED)	Btu	10,800	13,300	20,200
MOISTURE REMOVAL	Pts/h	2.3	2.7	4.2
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/399/509/622
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45
ELECTRICAL DATA				
POWER SOURCE	V, Ø, Hz	230/208-60-1	230/208-60-1	230/208-60-1
REFRIGERATION SYSTEM				
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	1/2
DIMENSIONS & WEIGHT				
W X H X D	in	35-1/4 x 11-1/4 x 8-1/4	35-1/4 x 11-1/4 x 8-1/4	40-5/8 x 12-7/8 x 9-5/8
NET WEIGHT	lbs	23	23	31
SHIPPING WEIGHT	lbs	27	27	40

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8-6.6-14.0	3.3-11.8-17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0-10.2-14.1	4.9-15.5-17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390-1430-3090	770-2720-3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420-2210-3100	1120-3580-4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 14	4 X 14
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MIN./MAX. LINE LENGTH (EACH)	ft	10-82	10-82
MIN./MAX. LINE LENGTH (TOTAL)	ft	75-246	75-246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATING RANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15	17
MAX. TD FUSE/BREAKER	A	25	25

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



## MULTIZONE CEILING CASSETTE

Indoor units are typically installed in a drop ceiling. The grille fits almost flush with the ceiling for a clean look and efficient installation.

### Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 23" lift\* included
- Natural air flow
- 4-Way cooling
- Cooling/Heating/Fan mode
- Dry mode
- Night Quiet Operation
- Built-in low ambient standard, down to 14°F (Cooling mode)
- 3 Fan speeds
- Evaporator frost control
- 24-hour on/off timer
- Auto restart
- Temperature display on remote
- Ultra-quiet turbo fan
- DiamonGold Advanced Corrosion Protection™
- Clean, modern look
- Flexible installation
- ENERGY STAR® qualified models
- Precise air distribution

\* Lift from drain pan to highest point. Use external drain pump for installations requiring condensate lift exceeding 23"



WIRELESS  
REMOTE CONTROL



**NOTE: Grilles are sold separately.**

See optional accessories on page 11.



MC12Y3JM, MC18Y3JM



MR24DY3JM



MR36TQY3JM



# SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Cassette - Heat Pumps	
INDOOR MODEL		MC12Y3JM	MC18Y3JM
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	12,000	18,000
CAPACITY HEATING (RATED)	Btu	13,800	19,000
MOISTURE REMOVAL	Pts/h	4.2	4.2
AIRFLOW ( LOW, MED, HIGH)	CFM	247 / 283 /335	388 / 424 / 459
SOUND RATING - INDOOR	dB-A	32/35/38	34/37/38
ELECTRICAL DATA			
POWER SOURCE	V, Ø, Hz	208/230, 1, 60	208/230, 1, 60
POWER AND COMMUNICATION CABLE	No. x AWG	4C x 14	4C x 14
REFRIGERATION SYSTEM			
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	1/2
DIMENSIONS & WEIGHT			
W X H X D	in	22-7/16 x 8-7/16 x 22-7/16	22-7/16 x 10-3/32 x 22-7/16
NET WEIGHT	lbs	31	33
SHIPPING WEIGHT	lbs	36	42
INDOOR UNIT GRILLE* W X H X D	in	27-9/16 x 7/8 x 27-9/16	27-9/16 x 7/8 x 27-9/16
INDOOR UNIT GRILLE* NET WEIGHT	lbs	7	7

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8~6.6~14.0	3.3~11.8~17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0~10.2~14.1	4.9~15.5~17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390~1430~3090	770~2720~3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420~2210~3100	1120~3580~4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 14	4 X 14
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MIN./MAX. LINE LENGTH (EACH)	ft	10~82	10~82
MIN./MAX. LINE LENGTH (TOTAL)	ft	75~246	75~246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATING RANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15	17
MAX. TD FUSE/BREAKER	A	25	25

\*Models require grille. Grille sold separately.

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.




## MULTIZONE CONCEALED DUCT

Indoor unit is installed in the ceiling or furr down for unobtrusive installation. Conditioned or non-conditioned air can be added to ducting to allow fresh air into the conditioned space whenever required.

### Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 23" lift\* included
- Cooling/Heating/Fan mode
- Dry mode
- 3 Fan speeds
- 24-hour on/off timer
- Auto restart
- Sleep mode
- Control lock function
- External Static Pressure Range (ESP)
  - 12,000 ( 0.0 - 0.16) WC
  - 18,000 ( 0.0 - 0.16) WC

\* Lift from drain pan to the highest point. Use external drain pump for installations requiring condensate lift exceeding 23"

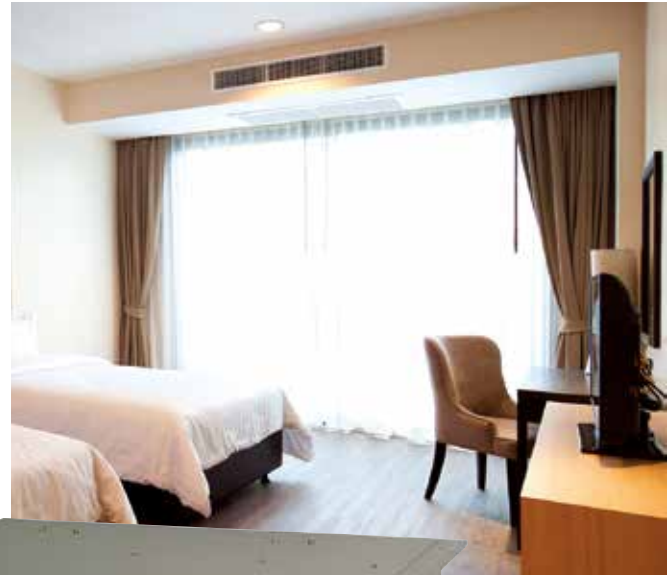

MD12Y3JM, MD18Y3JM



WIRED WALL  
CONTROLLER



MR24DY3JM



MR36TQY3JM

# SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Concealed Ducted - Heat Pumps	
INDOOR MODEL		MD12Y3JM	MD18Y3JM
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	12,000	18,000
CAPACITY HEATING (RATED)	Btu	13,800	19,000
MOISTURE REMOVAL	Pts/h	2.5	4.2
AIRFLOW ( LOW, MED, HIGH)	CFM	265 / 300 / 335	406 / 477 / 530
SOUND RATING - INDOOR	dB-A	26/31/33	29/31/34
ELECTRICAL DATA			
POWER SOURCE		208/230, 1, 60	208/230, 1, 60
POWER AND COMMUNICATION CABLE	No. x AWG	4C x 14	4C x 14
REFRIGERATION SYSTEM			
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	1/2
DIMENSIONS & WEIGHT			
W X H X D	in	32-9/32 x 7-15/32 x 22-5/8	43-5/16 x 7-15/32 x 22-5/8
NET WEIGHT	lbs	45	58
SHIPPING WEIGHT	lbs	51	65

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8~6.6~14.0	3.3~11.8~17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0~10.2~14.1	4.9~15.5~17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390~1430~3090	770~2720~3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420~2210~3100	1120~3580~4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 18	4 X 18
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MAX. LINE LENGTH	ft	246	246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATINGRANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15.4	16.8
MAX. TD FUSE/BREAKER	A	25	25

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$ .115 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



# Wired and wireless controllers.

## Wired controllers

Wall control thermostats have an infrared sensor that allows the settings to be changed by using the wireless remote control.



**WIRELESS REMOTE**  
Cassette and  
All Wall-mounted Models



**WIRED REMOTE**  
Concealed Ducted  
D24YJ, D36YJ  
MD12Y3JM, MD18Y3JM



**OPTIONAL WIRED REMOTE**  
DWC1- Works with all Friedrich ductless models  
**PROGRAMMABLE SETTINGS**

- Simple program ( 1 to 7 hour) ON/OFF
- ON/OFF at set time
- 7 Day schedule
- Sleep program
- Holiday schedule

# Wireless diagnostic tool for Friedrich Precision Inverter Ductless Split Systems

**Monitor and diagnose wall-mounted ductless systems\* for quick service responses**

3 EASY STEPS:

1. Download Friedrich Diagnostic App from Google Play or App Store
2. Connect DWTST module to outdoor unit
3. Begin monitoring unit



Technicians can observe various data points, such as:

- Thermistor temps
- DC link voltage
- Fan RPM
- EEV pulse
- Error codes



DWTST

### IMPORTANT

\*Friedrich DWTST works only with Friedrich Precision Inverter™ wall-mounted ductless split systems. Applications are subject to change without notice. Not for use with other Friedrich models or other brands of products.

The Next Generation of Ductless Split Systems

# 174 Multizone combinations

## MIX AND MATCH

Wall-mounted, concealed duct and ceiling cassette models.




Enjoy the flexibility to mix and match systems to fit your application.


Control the temperature in individual rooms for optimum comfort and energy savings.









**PRECISION**  
**INVERTER**

# MULTIZONE SYSTEMS CAPACITIES AND RATINGS




Friedrich Model Number	AHRI Reference Number	Indoor Type	System Capacity	EER	SEER	High Heat 47°F	HSPF	Low Heat 17°F
<b>MR24DY3JM</b> 	7012702	Mixed Ducted and Non-ducted Indoor Units <span style="color:blue">■</span> <span style="color:green">■</span> <span style="color:orange">■</span>	18600	12.60	19.05	26300	8.95	16300
	7012703	Ducted Indoor Units <span style="color:green">■</span>	18000	11.80	16.40	26200	8.50	16400
	7012704	Non-Ducted Indoor Units <span style="color:blue">■</span> <span style="color:orange">■</span>	19200	13.40	21.70	26400	9.40	16200

<b>MR36TQY3JM</b> 	7012710	Non-Ducted Indoor Units <span style="color:blue">■</span> <span style="color:orange">■</span>	34000	12.50	17.50	41000	10.50	26000
	7012711	Ducted Indoor Units <span style="color:green">■</span>	34000	12.00	16.50	41000	9.50	27400
	7012712	Mixed Ducted and Non-ducted Indoor Units <span style="color:blue">■</span> <span style="color:green">■</span> <span style="color:orange">■</span>	34000	12.25	17.00	41000	10.00	26700




MR24DY3JM Combinations							
Indoor Unit Combinations	Wall-Mounted		Ducted		Cassette		
	9K	12K	12K	18K	12K	18K	
2	2						
	1	1					
	1		1				
	1			1			
	1				1		
	1					1	
	1						1
	1						
	2						
	1	1					
	1		1				
	1			1			
	1				1		
	1					1	
3	3						
	2	1					
	2		1				
	2			1			
	1	2					
	1		2				
	1			2			
	1	1		1			
	1		1		1		
	1	1			1		

MR36TQY3JM Combinations							
Indoor Unit Combinations	Wall-Mounted		Ducted		Cassette		
	9K	12K	12K	18K	12K	18K	
2	2						
	1	1					
	1		1				
	1			1			
	1				1		
	1					1	
	1						1
	2						
	1	1					
	1		1				
	1			1			
	1				1		
	1					1	
	1						1

MR36TQY3JM Combinations

3 Indoor Unit Combinations							
	Wall-Mounted			Ducted		Cassette	
	9K	12K	18K	12K	18K	12K	18K
3							
2	1						
2		1					
2			1				
2				1			
2					1		
2						1	
2							1
1	2						
1	1	1					
1	1		1				
1	1			1			
1	1				1		
1	1					1	
1	1						1
1		2					
1		1	1				
1		1		1			
1		1				1	
1		1					1
1			2				
1			1	1			
1				2			
1			1		1		
1					2		
1					1	1	
1							2
1							2
	1				2		
	3						
	2	1					
	2		1				
	2			1			
	2				1		
	2					1	
	2						1
	1	2					
	1	1	1				
1			1				1
1			1			1	
1				2			
			1	1			1
				1			1
			1		2		
1				1			1
			1		1		1
				1		1	1
	1				1		1
	1	1				1	
	1	1					1
	1		1	1			
	1				1		1
	1					1	1
		2		1			
		2				1	
1	1			1			

MR36TQY3JM Combinations

3 Indoor Unit Combinations							
	Wall-Mounted			Ducted		Cassette	
	9K	12K	18K	12K	18K	12K	18K
			1	1		1	
			1	1			1
			1		1	1	
				3			
				2	1		
				2		1	
				2			1
				1	2		
				1			2
					2	1	
					1	2	
						3	
						2	1
1				1			1
1						2	
		1				1	1
			1				
				2			
				1	2		
						1	2

4  
Indoor Unit  
Combinations

4							
3	1						
3		1					
3			1				
3				1			
3					1		
3						1	
2	2						
2				2			
2						2	
2	1			1			
2	1					1	
1	3						
1				3			
1						3	
1	1			2			
1	1					2	
2				1		1	
2				1			1
2					1	1	
2						1	1
1	1			1		1	
2	1	1					
2	1						1
2		1		1			
2		1				1	
1	2			1			
1	2					1	
	3			1			
	3					1	
	4						
	2			2			
	2			1		1	
	2					2	
	1					3	
	1				3		
				4			
				1		3	
				2		2	
						4	



# NOMENCLATURE

<b>1</b>	<b>M</b>	<b>2</b>	<b>RH</b>	<b>3</b>	<b>36</b>	<b>4</b>	<b>D</b>	<b>5</b>	<b>Y</b>	<b>6</b>	<b>3</b>	<b>7</b>	<b>J</b>	<b>8</b>	<b>M</b>
1	Series	2	Model Type	3	Capacity	4	Application	5	Refrigeration Cycle	6	Voltage	7	Marketing Model	8	Installation Type
	Mini-split		<b>W= Wall-mounted</b> <b>C= Cassette</b> <b>D= Concealed Ducted</b> <b>R= Outdoor component</b> <b>WH= Wall-mounted High SEER</b> <b>RH= Outdoor high SEER</b>		<b>9 = 9,000 BTU/h</b> <b>12 = 12,000 BTU/h</b> <b>18 = 18,000 BTU/h</b> <b>24 = 24,000 BTU/h</b> <b>30 = 30,000 BTU/h</b> <b>36 = 36,000 BTU/h</b>		<b>Empty = Single</b> <b>D = Dual Zone</b> <b>T = Tri-Zone</b> <b>Q = Quad Zone</b> <b>U = Universal</b>		<b>C = Cool Only</b> <b>Y = Heat Pump</b>		<b>1 = 115V/60hz/1</b> <b>3 = 230V/60hz/1</b>		(Internal Use)		M = Multi Zone

## REFRIGERATION LINE SETS MINIMUM/MAXIMUM LENGTHS

Single Zone				
System Model	Outdoor	Indoor	Min. (ft.)	Max. (ft.)
M09YJ	MR09Y3J	MW09Y3J	7	66
M12YJ	MR12Y3J	MW12Y3J	7	66
M18YJ	MR18Y3J	MW18Y3J	10	66
M09CJ	MR09C1J	MW09C1J	7	66
M12CJ	MR12C1J	MW12C1J	7	66
M18CJ	MR18C3J	MW18C3J	10	66
M24CJ	MR24C3J	MW24C3J	10	98
M24YJ	MR24Y3J	MW24Y3J	10	164
M30YJ	MR30Y3J	MW30Y3J	10	164
M36YJ	MR36Y3J	MW36Y3J	10	164
HM12YJ	MHR12Y3J	MHW12Y3J	10	49
C24YJ	MR24UY3J	MC24Y3J	25	164
C36YJ	MR36UY3J	MC36Y3J	25	246
D24YJ	MR24UY3J	MD24Y3J	25	164
D36YJ	MR36UY3J	MD36Y3J	25	246

## TORQUE WRENCH SETTINGS

Multizone Outdoor		Individual Zone Line Lengths		Combined System Line Lengths	
		Min. (ft.)	Max. (ft.)	Min. (ft.)	Max. (ft.)
MR24DY3JM	Dual Zone	10*	82	25	246
MR24DY3JM	Tri Zone	10*	82	75	246
MR36TQY3JM	Dual Zone	10*	82	25	246
MR36TQY3JM	Tri or Quad Zone	10*	82	75	246

Outside Diameter		Torque	
mm	inch	ft.-lbs.	N-m
Ø6.35	1/4	13~18	17.6~24.5
Ø9.52	3/8	25~30	33.3~41.2
Ø12.7	1/2	40~47	53.9~64.7
Ø15.88	5/8	45~59	61.7~80.4

\*The combined line lengths of the individual zones must equal the minimum line length for the selected multizone system.  
 For a Dual Zone System: The combined lengths must equal at least 25 feet.  
 For a Tri Zone or Quad Zone System: The combined lengths must equal at least 75 ft.



The Next Generation of Ductless Split Systems



**FRIEDRICH**

1 8 8 3